



# Brighter LED Lighting Co.,Ltd.

Add:No. 10, Keji East Road, Songxia industrial zone, Songang, Nanhai District, Foshan City, 528234, Guangdong Province, China

Tel: +86 757 85221719

Fax:+86 757 85222669,

Web.:www.brtled-light.com





52.5mm



40.5mm

Ultra slim design in both height and depth, offering 80% expansion of the installation range.

### DRIVING BEAM

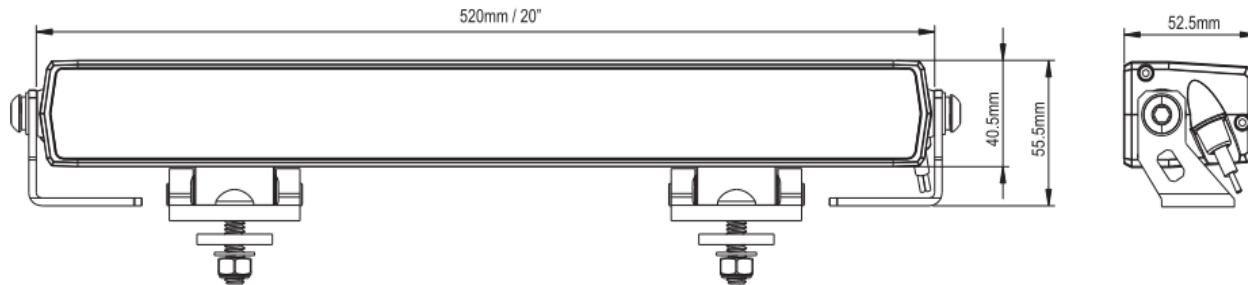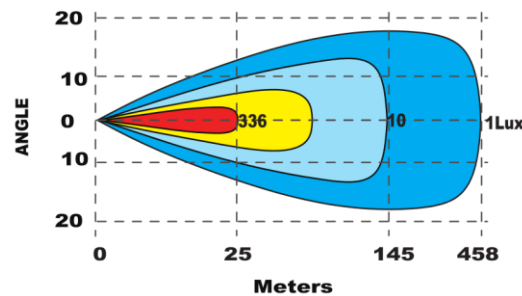

### Materials:

- LED: 8W LP LEDs
- Color Temperature: 6000K
- 6063 extruded Aluminum Heat-Sink
- Efficient Polycarbonate(PC) Reflector
- Lexan Polycarbonate(PC) Front Cover
- Anodized Polyester Powdercoat
- Bottom bracket: Aluminum(6063#)
- Side bracket: Stainless steel(SUS201)

### Features:

- Driving Beam (**Ref. No. 50**)
- Ultra Slim, its Height Only 40.5mm
- Anti Rust / Corrosion / Freezing Resistance
- Electronic Thermal Management (**ETM**)
- Side-Reflecting Optic System
- ECE R10, R112,R7, CE, ROHS
- Over / Under Voltage Protection
- Reverse Polarity Protection
- UV Resistant, Shock Resistant-15G
- **Comply with IP68 / IP69K**
- LED Lifespan: 50,000+ Hr
- Warranty: one year

| Part NO.   | LEDs     | Dimensions (mm) | Beam pattern       | AMP Draw (12V/24V) | Luminous Flux (lm)      | Peak Beam Intensity(cd) | Operating conditions:                                       |
|------------|----------|-----------------|--------------------|--------------------|-------------------------|-------------------------|-------------------------------------------------------------|
| BL1805S3-P | 12pcs*8W | 520*40.5*52.5   | Driving beam (35°) | 6.2A / 2.6A        | Raw lumens:9600lm       | 210000cd                | · Voltage: DC9-36V<br>· Environment temperature -40~+60 ° C |
|            |          |                 |                    |                    | Effective Lumens:8100lm |                         |                                                             |