




Brighter LED Lighting Co.,Ltd.

Addr: No. 10, Keji East Road, Songxia industrial zone, Nanhai, Foshan, Guangdong, China

Tel: +86 757 81635176/85222669 Fax: +86 757 85221719, Web.: www.brighterledlighting.com

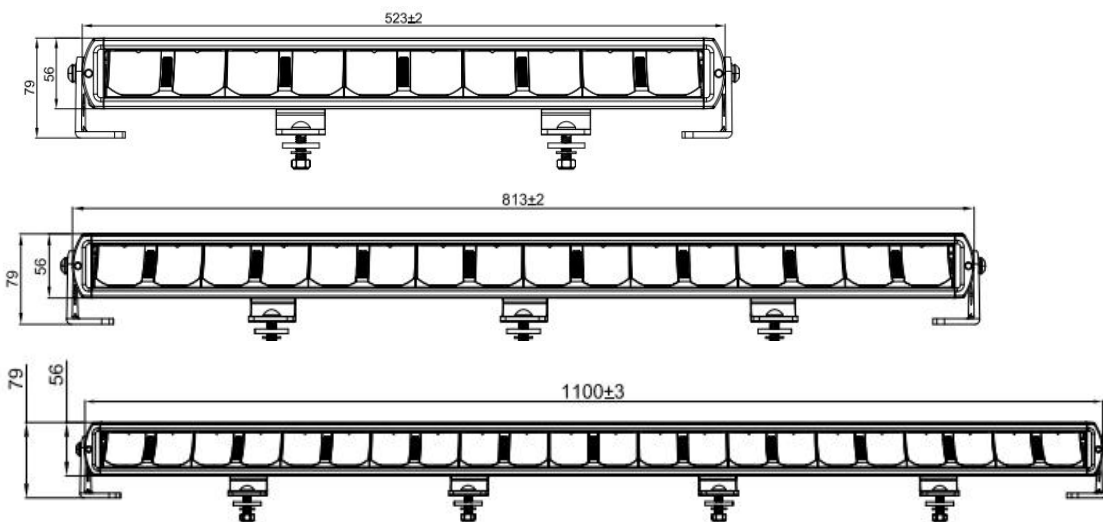

Part NO.	LEDs	L*W*H (mm)	Inch	Beam pattern	AMP Draw (12V/24V)	Raw Luminous Flux (lm)	Effective Lumens	Ref. No.	1Lux @ M	Peak Beam Intensity(cd)
BL1010CS-H	10x15W	523*56*73	20.0	Driving beam(25°)	7.8A/3.9A	12000	9800	50	458	209000
BL1610CS-H	16x15W	813*56*73	31.0	Driving beam(40°)	12A/5.9A	19200	15900	50	495	245000
BL2210CS-H	22x15W	1100*56*73	43.0	Driving beam(50°)	16.2A/7.8A	26400	21100	50	525	275000

Materials:

- 150W/240W/330W Curved LED Light bar (LP LEDs)
- Color Temperature: 6000K
- 6063 extruded Aluminum Heat-Sink
- Efficient Polycarbonate(PC) Lens
- Lexan Polycarbonate(PC) Front Cover
- Side bracket(SUS201)
- Slidable bottom bracket (Aluminum#6063)

Features:

- Self-Developed Side Emitting Optical System
- Driving Beam+Park light(ECE R112/R7 approved)
- 40% Brighter Than Other Similar Wattaged Light Bars
- Electronic Thermal Management (ETM)
- Pressure Equalizing Vent
- EMC Compliant(ECE R10,CE)
- Over / Under Voltage Protection
- Reverse Polarity Protection
- UV resistant, shock resistant-15G
- IP Rating: Comply with IP68/IP69K
- Lifespan 50,000+ Hours
- Warranty: 1 Year

- Two Different Mounting Options Are Available

Operating conditions:

- Environment Temperature -40~+60 ° C
- Voltage: DC9-36V