

FT-320 LED

3-functional LED lamp

- Rear running light
- STOP light
- Indicator



Power consumption:

- rear running light: 12V/24V = 0.1A/0.1A
- STOP light: 12V/24V = 0.2A/0.2A
- indicator: 12V/24V = 0.35A/0.35A

Power consumption:

- rear running light: 12V/24V = 1.5W/3W
- STOP light: 12V/24V = 2.5W/5W
- indicator: 12V/24V = 4.5W/9W

- **Horizontal approval**
(FT-320 LED DI, FT-320 LED DI BAJONET, FT-320 LED DI BAJONET + SS)
- **Vertical / horizontal approval**
(FT-320 LED, FT-320 LED BAJONET)

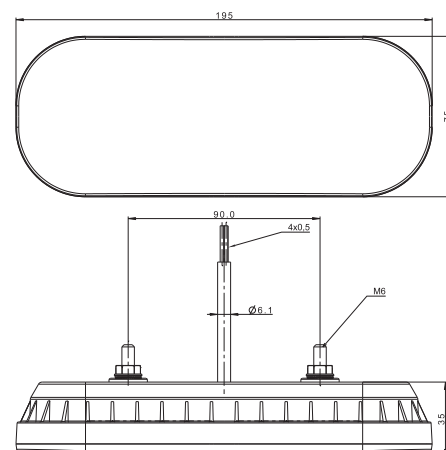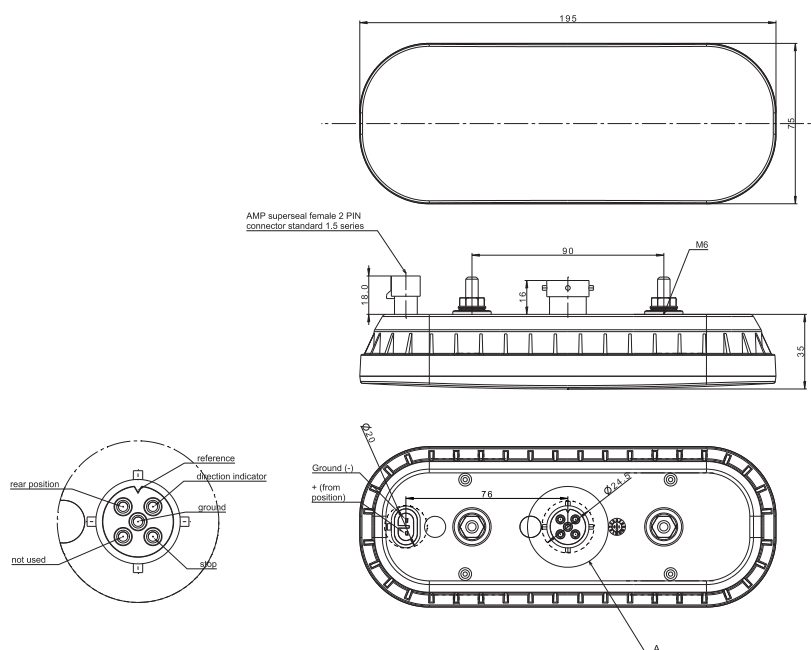

FT-320 LED DI	Universal LED rear lamp, 12/24V, dynamic indicator with a wiring loom, smoked lampshade, cable 1 m.
FT-320 LED DI BAJONET	Universal LED rear lamp, 12/24V, dynamic indicator with a bayonet connector, smoked lampshade, bayonet connector.
FT-320 LED DI BAJONET + SS	Universal LED rear lamp, 12/24V, dynamic indicator with a bayonet connector and an additional Super Seal socket for fog or reverse light.
FT-320 LED	Universal LED rear lamp, 12/24V, static indicator with a wiring loom, smoked lampshade, cable 1 m.
FT-320 LED BAJONET	Universal LED rear lamp, 12/24V, static indicator with a bayonet connector, smoked lampshade, bayonet connector.