


OPERATION INSTRUCTION


LED SEARCH LIGHT

S30

Specifications

- Spot beam and flood beam in one light
- Wire/ wireless control in one controller
- Vertical movement 90°, horizontal movement 360°, infinite
- Automatic reset after power off
- Waterproof IP67
- Permanent mount





















- Proper installation of this product requires the installer to have a good understanding of automotive electronics, systems and procedures.
- Failure to use specified installation parts or hardware will void the product warranty.




- For this product to operate at optimum efficiency, a good electrical connection to chassis ground must be made.
- It is recommend that these instructions be stored in a safe place and referred to when performing maintenance or reinstallation of this products.
- Do not install and/or operate this safety product unless you have read and understand the safety information contained in this manual.

This document provides all the necessary information to allow your product to be properly and safely installed. Before beginning the installation and operation of your new product, the installation technician and operator must read this manual completely.

This manual describes how to use the remote search light.

In this manual you will learn about:

- 1. Basic function of the remote control;
- 2. Connect the light to remote control.

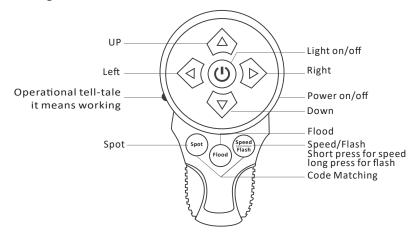

Basic functions

Only on condition that the light is connected to remote controller, it can be remote controlled.

On: Press to turn on the light

Off: Press again to turn off the lights and reset

Up: Head up Down: Head down Left : Turn left Right: Turn right

Spot: Spot and short/long press can adjust the beam Flood: Flood and short/long press can adjust the beam Speed/Flash: Default the fast speed. Press one time

to adjust the speed. Long press change to SOS





Connect the light

Factory setting has been coded.

Disonnect the light

If you find the remote control is not matching the light, please do the following:

- 1. Press the Spot key and the Speed / Flash key at the same time for 5 seconds when power supply connected.(Picture 1)
- 2. If the light flashes, the coding is successful; otherwise, the coding fails.
- 3. If the coding fails, the power must be turned on again, and repeat above operation.

