

luxu

Luxu Vibe Ledbar 20" XU-V-SR-120



Only 1 wire to switch Boost and E-mode



IP67&IP69K


ECE R10 R148 R149 R65




INFORMATION

Item#	Size	Function	Power		Lumen		1Lux@1M	
			Boost	E-mode	Boost	E-mode	Boost	E-mode
XU-V-SR-120	20in	Driving light	125W	65W	11000LM	5600LM	430M	310M
		White position light	2.5W		/		/	
		Amber position light	2.5W		/		/	
		Warning light	7W		/		/	

SIZE

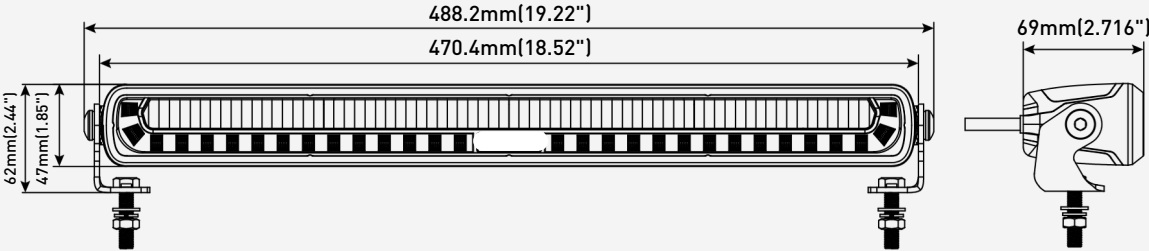

CERTIFICATION

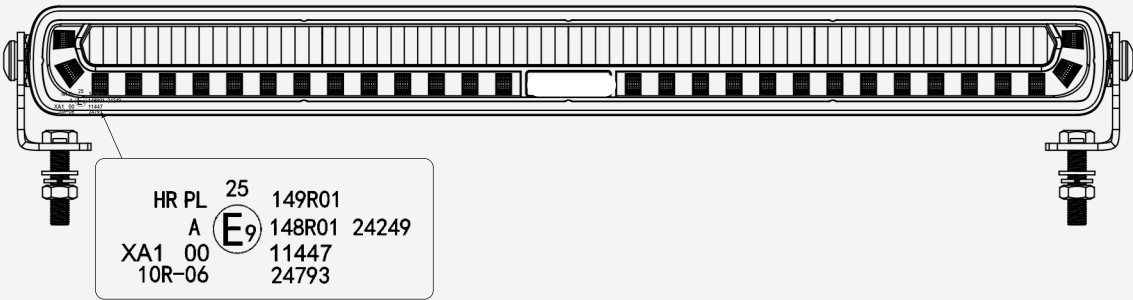

PICTURE

The image displays two perspectives of the Luxu LED light bar. The top view shows the front of the unit, which has a black, elongated rectangular body with a clear lens revealing the internal LED array. The brand name 'luxu' is printed in white on the front panel. The bottom view shows the side of the unit, highlighting the black cooling fins and the mounting brackets at each end. A power cable is visible on the right side.

Bracket Adjustable to make it easy to for installation on different direction.



BACK BRACKET

SIDE BRACKET

The image consists of two side-by-side photographs. The left photograph shows a white Tesla Model 3 driving towards the camera on a snowy road at night. The car's headlights are on, and a bright yellow LED light strip is visible on the front bumper. The right photograph shows a Volvo truck driving towards the camera on a snowy road at night. The truck's headlights are on, and a bright yellow LED light strip is visible on the front bumper. Both vehicles are equipped with the Light Signature LED strip, which is a feature of the Volvo On Call service.

Boost : 1Lux@430m

240.9 192.7
385.5 154.2
433.6 96.37 48.18 24.09 9.637 4.848 1LX

48m 32m 16m 0m 16m 32m 48m

0m 80m 160m 240m 320m 400m 480m

481.8 433.6 385.5 240.9 192.7 154.2 96.37 48.18 24.09 9.637 4.848 1.000 lx

E-mode : 1lux@310m

195.6 97.81
220.1 122.3 78.24 48.90 24.45 12.23 4.890 2.445 1LX

48m 32m 16m 0m 16m 32m 48m

0m 50m 100m 150m 200m 250m 300m 350m

248.3 220.1 195.6 122.3 97.81 78.24 48.90 24.45 12.23 4.890 2.445 1.000 lx

DRIVING LIGHT

- ① Initial default setting: Boost high beam
- ② Quick switch high beam ON/OFF two times within 0.7 senconds change from Boost to E-mode
- ③ Same operation quick switch high beam ON/OFF two times within 0.7 senconds change from E-mode to Boost
- ④ Turn off high beam over 1 seconds , turn on the high beam will back to Boost




POSITION LIGHT (DYNAMIC START UP)



AMBER POSITION LIGHT (OFF-ROAD)



WHITE POSITION LIGHT (ECE R148)

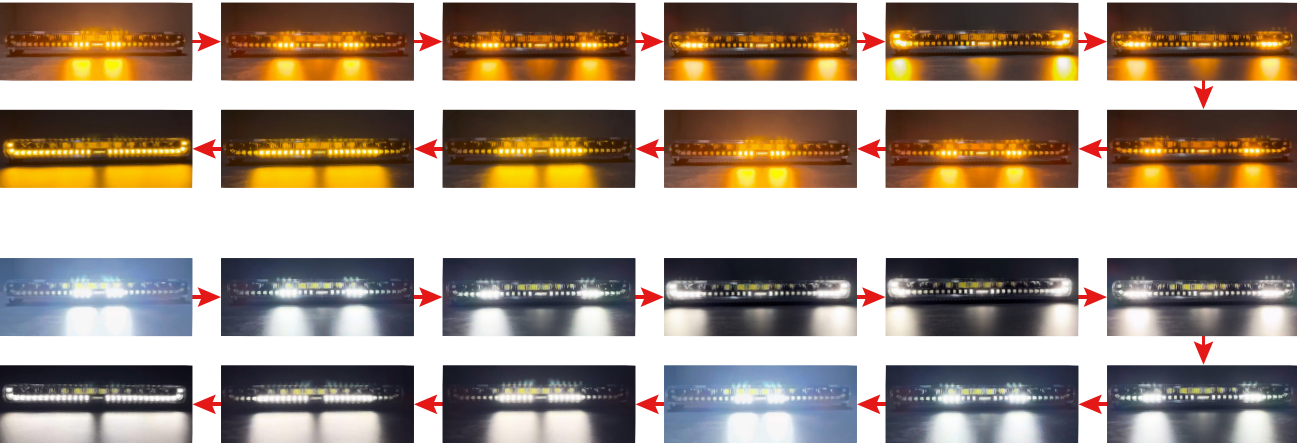


WARNING LIGHT (4 MODES FLASH)




Flash mode	
Single flash (ECE R65)	Double flash
Triple flash	Five Flash


THE EXPLOSION FIGURE

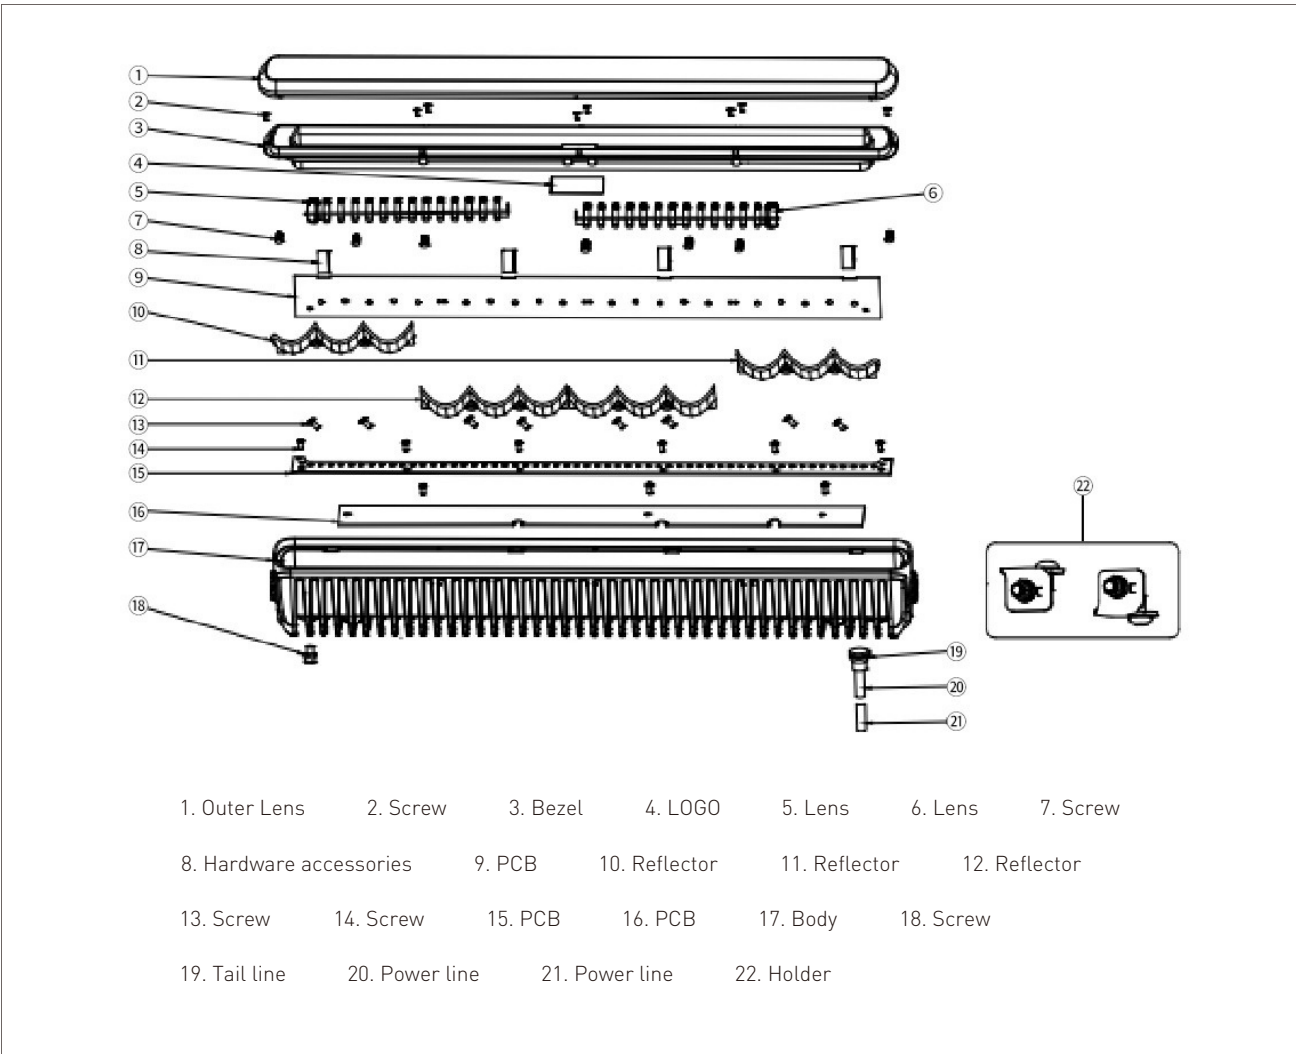

CONNECTION MODE

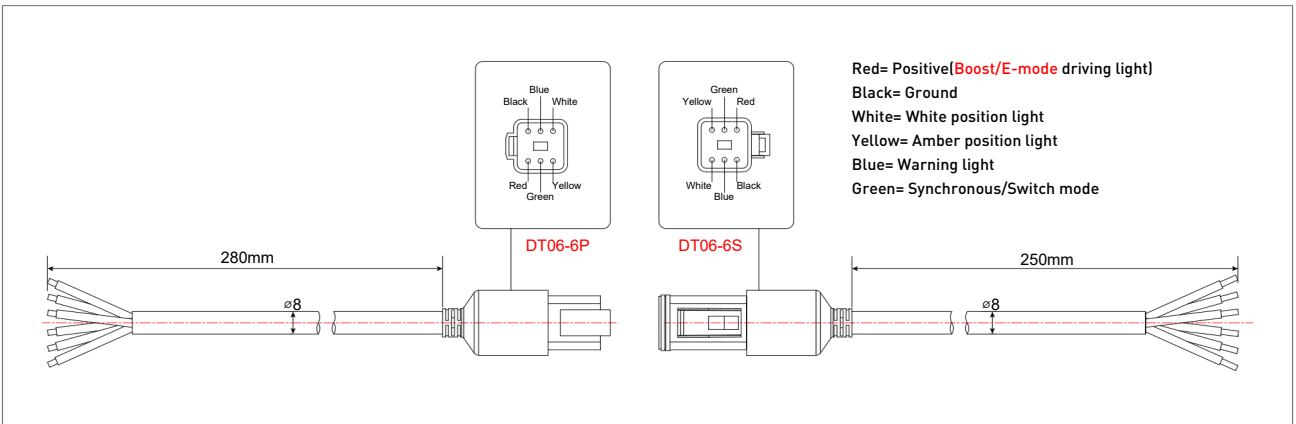

PACKAGING

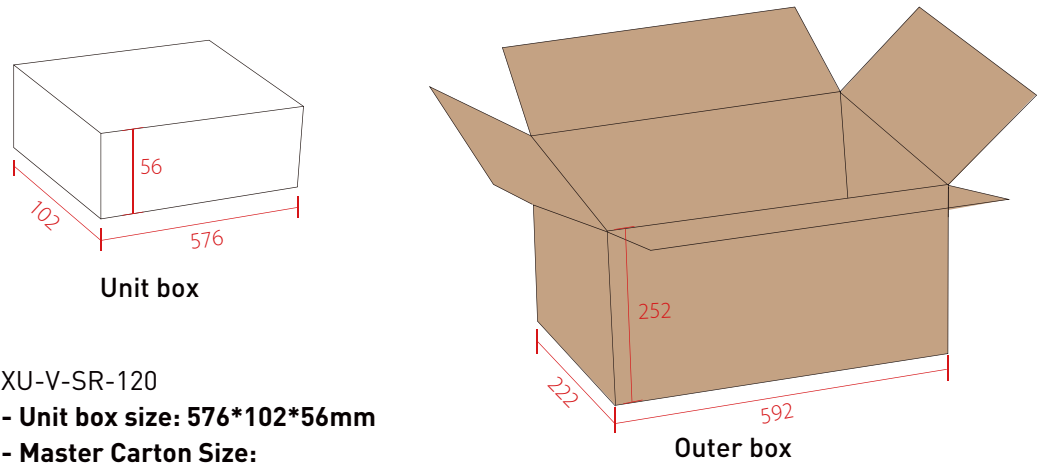

XU-V-SR-120
- Unit box size: 576*102*56mm
- Master Carton Size:
592*222*252mm - Net Weight
of Each Lamp: 1.649KG - Gross
Weight per Carton: 13.692 KG -
Quantity of Each Carton: 8 pcs