

luxu



Luxu Vibe 120 XU-V-120

Only 1wiretoswitchBoostand E-mode




IP67&IP69K

ECE R10 R148 R149 R65




INFORMATION

Item#	Size	Power		Lumen		1Lux@M	
		Boost	E-mode	Boost	E-mode	Boost	E-mode
XU-V-120	7in	110W	56W	5300LM	2400LM	440M	310M

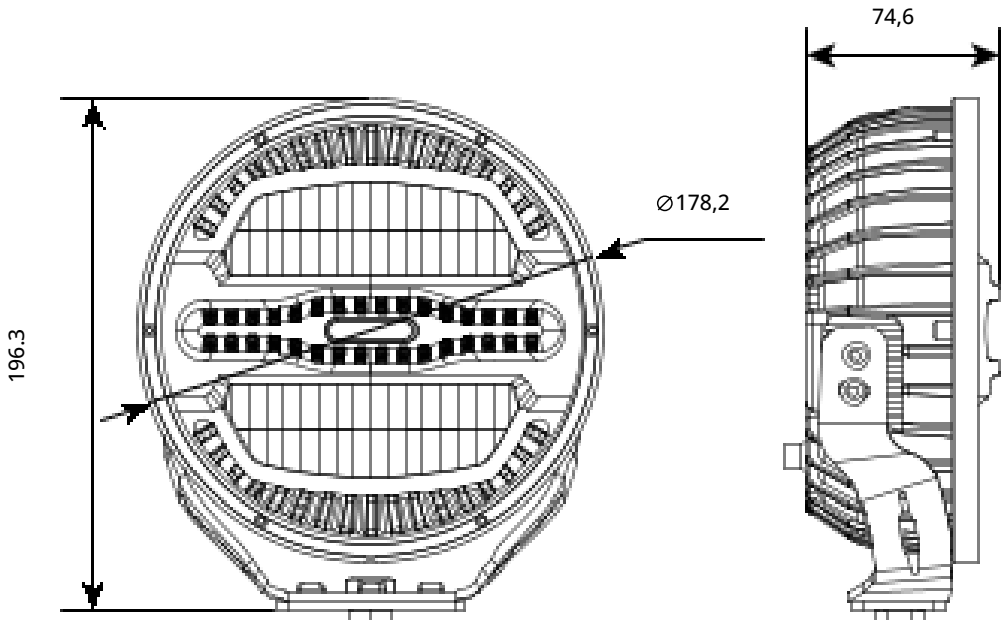

PICTURE

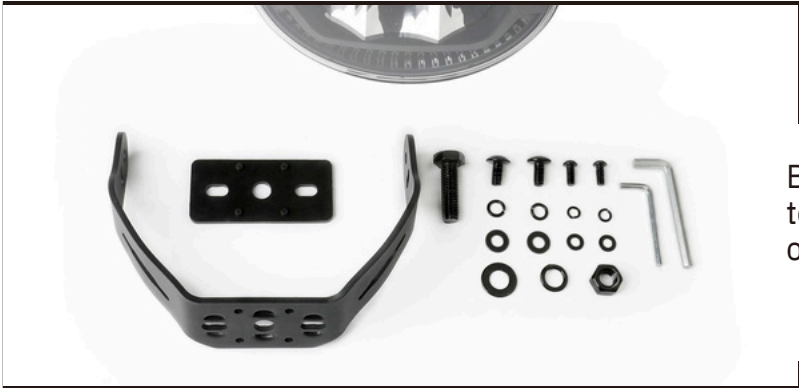


Bracket Adjustable
to make it easy to for installation
on different direction.

SERIES DESIGN ROUNAD AND OVAL




LIGHTING

Boost : 1Lux@440m

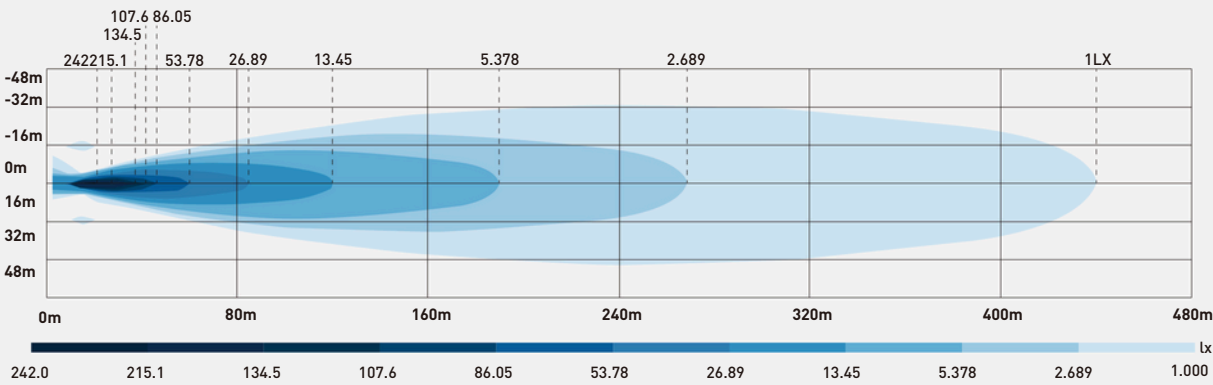

E-mode : 1lux@310m

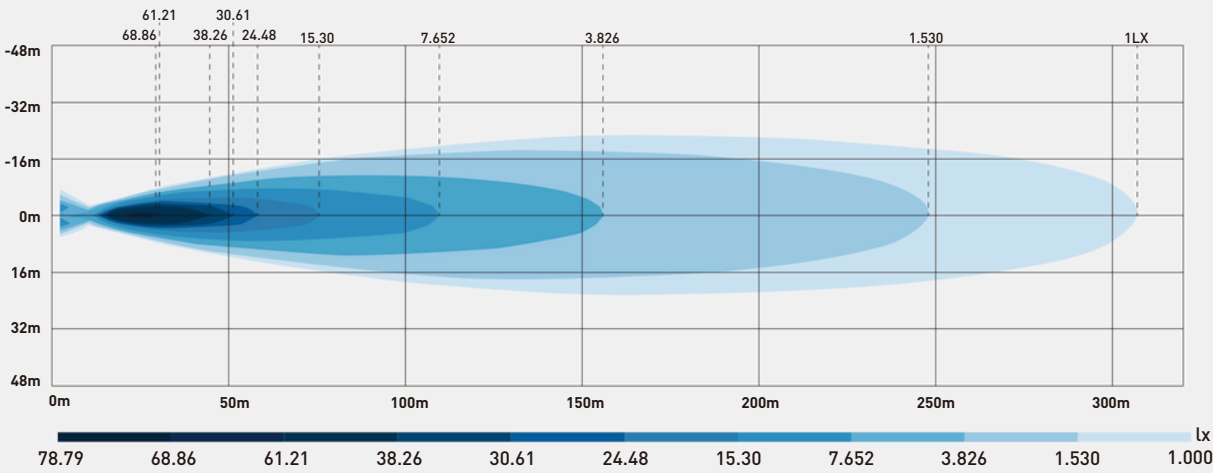

DRIVING LIGHT

- ① Initial default setting: Boost high beam
- ② Quick switch high beam ON/OFF two times within 0.7 senconds change from Boost to E-mode
- ③ Same operation quick switch high beam ON/OFF two times within 0.7 senconds change from E-mode to Boost
- ④ Turn off high beam over 1 seconds , turn on the high beam will back to Boost





POSITION LIGHT (DYNAMIC START UP)



AMBER POSITION LIGHT (OFF-ROAD)



WHITE POSITION LIGHT (ECE R148)

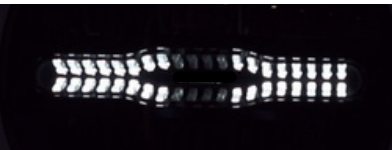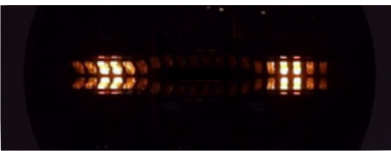


WARNING LIGHT (4 MODES FLASH)



Flash mode	
Single flash	Double flash
(ECE R65) Triple flash	Five Flash

THE EXPLOSION FIGURE

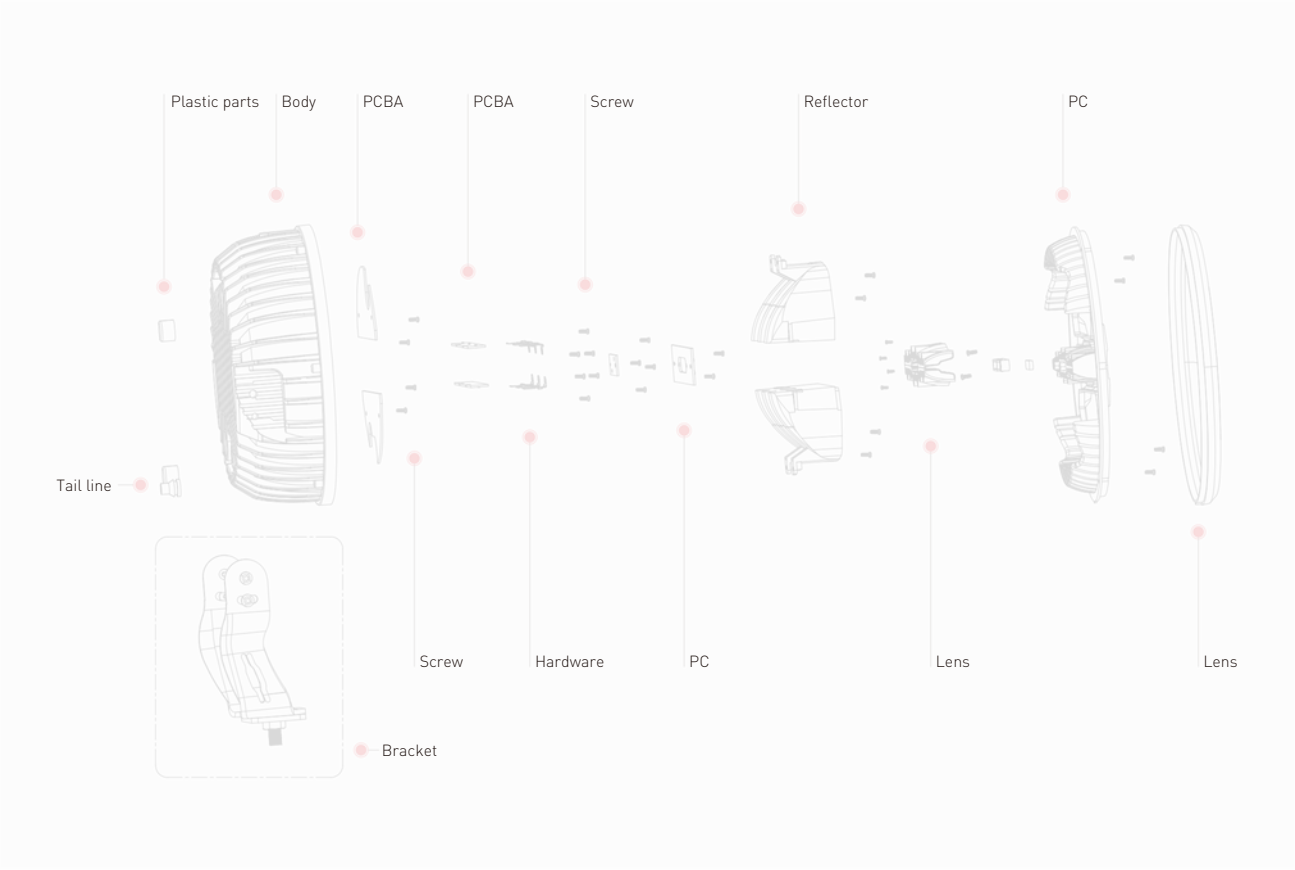

CONNECTION MODE



PACKAGING

